


FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Low forward voltage drop
- High current capability, High reliability
- Low power loss, high efficiency
- High surge current capability
- High speed switching, Low leakage
- High temperature soldering guaranteed: 260 °C/10 seconds at terminals
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

MECHANICAL DATA

- *Case:* JEDEC DO-41 molded plastic body
- *Terminals:* Lead solderable per MIL-STD-750, method 2026
- *Polarity:* Color band denotes cathode end
- *Mounting Position:* Any
- *Weight:* 0.012ounce, 0.33 gram

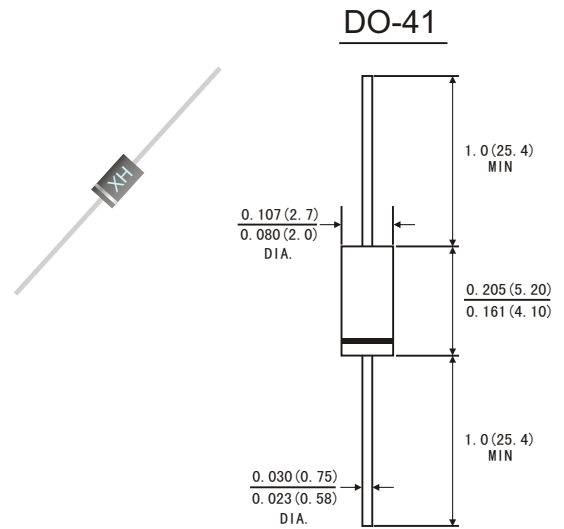

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified, Single phase, half wave 60Hz, resistive or inductive)

load. For capacitive load, derate current by 20%)

	Symbols	HER 101	HER 102	HER 103	HER 104	HER 105	HER 106	HER 107	HER 108	Units
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	300	400	600	800	1000	Volts
Maximum RMS voltage	V _{RMS}	35	70	140	210	280	420	560	700	Volts
Maximum DC blocking voltage	V _{DC}	50	100	200	300	400	600	800	1000	Volts
Maximum average forward rectified current 0.375"(9.5mm) lead length at T _A =50°C	I _(AV)	1.0								Amp
Peak forward surge current 8.3ms sing-wave superimposed on rated load (JEDEC method)	I _{FSM}	30.0								Amps
Maximum instantaneous forward voltage at 1.0 A	V _F	1.0		1.3		1.7			Volts	
Maximum DC Reverse Current at rated DC blocking voltage	I _R	5.0								μA
Maximum full load reverse current full cycle average. 0.375"(9.5mm) lead length at T _L =55°C		100								
Maximum reverse recovery time (Note 1)	T _{rr}	50				70			ns	
Typical junction Capacitance (Note 2)	C _J	20				15			pF	
Operating and storage temperature range	T _J T _{STG}	-65 to +150								°C

Notes: 1. Test conditions: I_F=0.5A, I_R=1.0A, I_{rr}=0.25A.

2. Measured at 1MHz and applied reverse voltage of 4.0V Volts

FIG.1-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

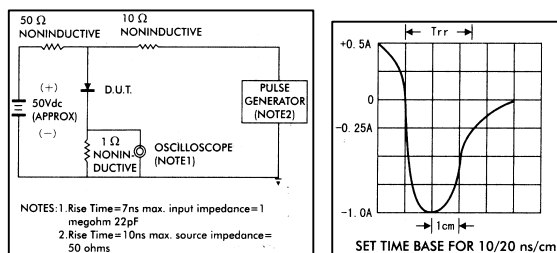


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

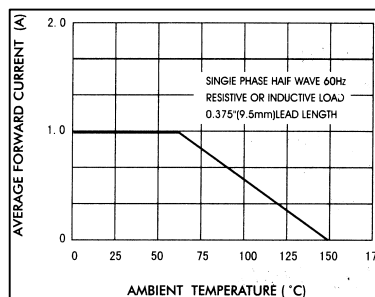


FIG.3-TYPICAL FORWARD CHARACTERISTICS

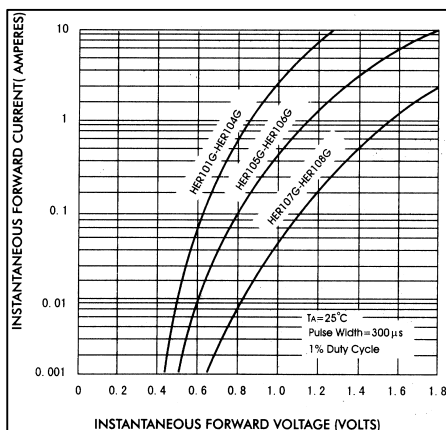


FIG.4-TYPICAL REVERSE CHARACTERISTICS

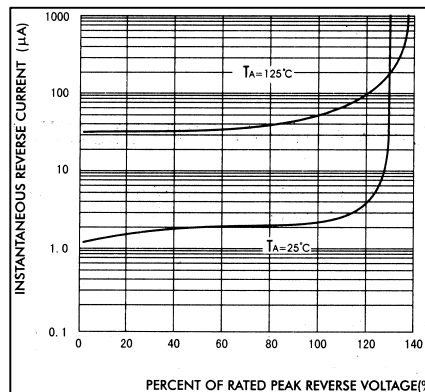


FIG.5-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

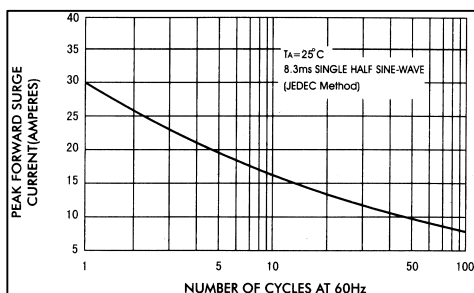


FIG.6-TYPICAL JUNCTION CAPACITANCE

